



AUTOMATIC DOOR OPERATOR ORDER


Date		<u> </u>	Purchase Order			
Company						
Job Name Site Address						
Site Contact						
Door Location/ID						
MODEL						
MODEL LS220 - M LS300 - M LS500 - M Other	Up to 260kg Up to 380kg Up to 500kg		Single Slide Bi Parting Bi Slide (Te			
To Suit	Framed	☐ Fr	ameless 🗌	Solid		
	Exact Door Leaf	Width needed for	or Frameless (over 120	kg will need extra holes in glass)		
Pelmet Colour						
O'reas Oreanter and Develope						
Sizes – Operator and Door Leaf		D 1 6 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	l- mm			
Overall Length Height from FFL	mm mm		Door Leaf Width Clear Opening Width mm mm			
If Single Slide Show Direction from R2L or L2R Operator Side						
Security						
_			No Lock Required □			
<u>Activation</u>						
Motion Sensor			Motion Sensor			
Access Control (by others)		Emergency Push Button				
Std Key Entry Switch			Al Digital Devic	ce Manager (Controller)	•	
Lock-it-Well MK2 Entry Switch		Lock-it-Well Mk	4 pos Mode Switch			
Accessible Toilet Set						

Switch cables must be run before wall/ceiling finishes. A Prewire visit may be required. Builder must supply locations for switches and buttons.





AUTOMATIC DOOR OPERATOR ORDER

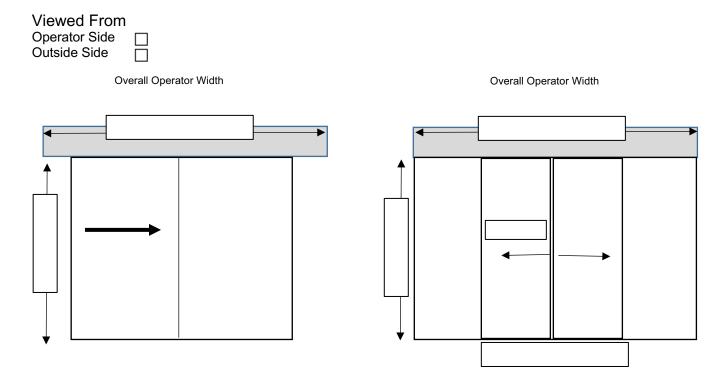

Viewed from Internal (Operator Side)

